


VEHICLE RECOVERY WINCH  
**EW-9000**



**EW-9000**

- Rated Line Pull:** 9000 lbs. (4080kgs) Single-Line
- Motor:** 6.6HP Series-Wound
- Control:** Remote Switch, 12'(3.7m) lead
- Gear Train:** 3-Stage Planetary
- Gear Ratio:** 172.8:1
- Clutch:** Shift Pin Ring Gear
- Brake:** Automatic In-The-Drum
- Drum Size:** Diameter 2.52" (66mm) Length 8.82" (224mm)
- Wire Rope:** 94', 21/64" Diameter (28.5m, 8.2mm Diameter)
- Fairlead:** Roller Fairlead
- Remote Control:** Included
- Recommended Battery:** 650CCA Minimum for Winching
- Battery Leads:** 25mm<sup>2</sup>, 72" (1.83m)
- Finish:** Black/Dark Grey
- Weight:** 80.5 lbs. (36.5kg)
- Overall Dimensions:** (L x W x H) 22" x 6.3" x 8.1" (557 x 160 x 205mm)
- Mounting Bolt Pattern:** 10.00" ± 0.015" x 4.50" ± 0.010" (254.0mm x 114.3mm)

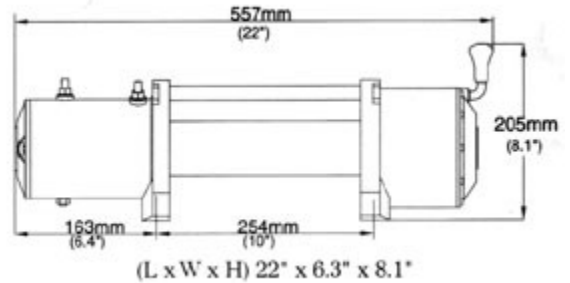

**Line Speed & Amp Draw-First Layer**

Line	lbs	No	2000	4000	6000	8000	9000	
Pull	kgs	Load	910	1814	2720	3630	4080	
Line	fpm	12V	37.2	18	13.1	10.2	8.2	7.2
Speed	Mpm	12V	11.4	5.5	4	3.1	2.5	2.2
Motor Current	Amps	12V	70	190	260	335	410	425

**Line Pull & Cable Capacity**

Layer of Cable		1	2	3	4
Rated Line Pull	lbs	9000	7990	7237	6713
Per Layer	kgs	4080	3621	3280	3042
Cable Capacity	ft.	16	42	72	94
Per Layer	m	5	12	21	28

Exclusive North American Distributor  
**T-Max, LLC**  
 P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

